


Product Type: PCB welding type intermediate relay

Product Name: SBB-RPF-1C

Product Description: SBB-RPF-1C

## Product Size

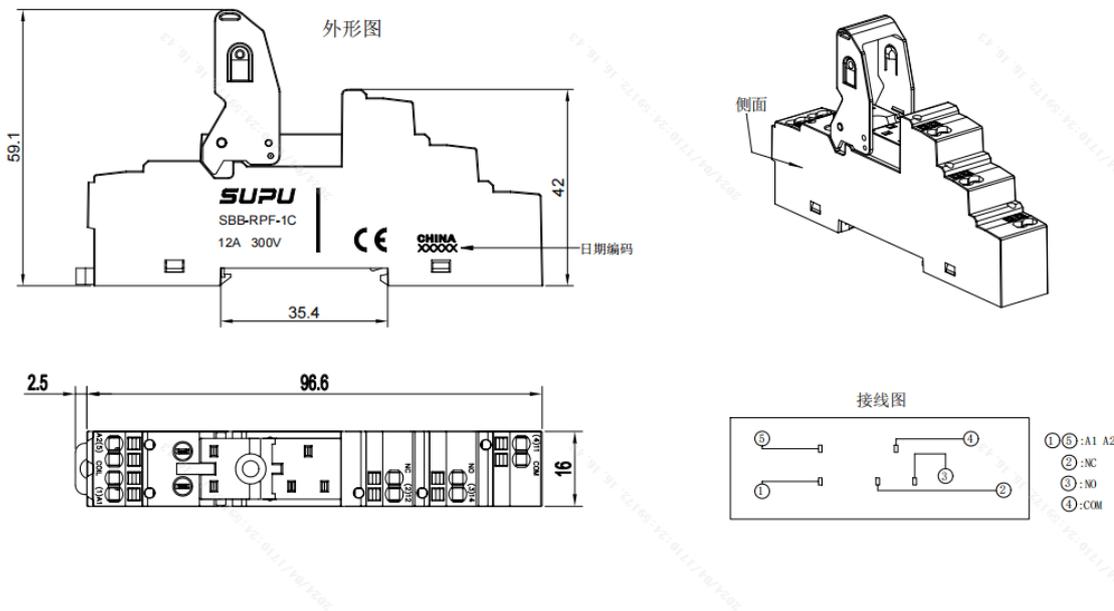

## Parameters

⌘ SUPU ID	1C
⌘ Protection Level	12A
⌘ Ambient temperature (operation)	II

☞ Mounting Type	-40°C~+85°C
☞ Connection method	DIN 35 rail mounting
☞ Contact connection type	Black

## Technical data

☞ IEC Rated Current	300V
☞ IEC Rated Voltage	Coils to contacts : 4000V/S Contacts to contacts : 2500V/S
☞ Overvoltage category	2
☞ Degree of pollution	IP20
☞ Stripping length	22-14/0.25-2.5AWG/mm2
☞ Wire Range	Relay socket
☞ Dielectric withstand voltage	/
☞ Screw torque	10-12/0.43Pin

## Commercial data

☞ Order No	PCS
☞ Packing unit	10
☞ Weight per unit (without packaging)	46
☞ Single piece weight	PCB Plug-in terminal-Plug SBB-RPF-1C-SUPU Electronic

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2026-03-03 10:34

The right to modify data belongs to SUPU.