






Product Type: Standard intermediate relay

Product Name: RGT-230AC-4C

Product Description: Standard industrial relay, 4 transfer contact 230VAC/ 7A, Test button

Product Size

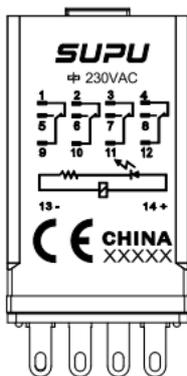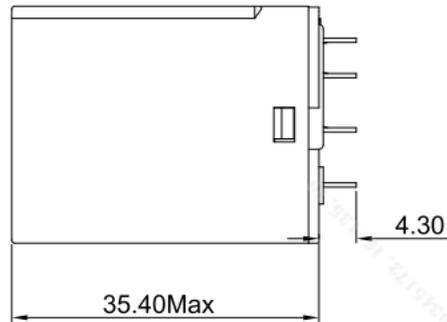

Parameters

<p> SUPU ID</p>	RGT-230AC-4C
<p> Protection Level</p>	IP47
<p> Ambient temperature (operation)</p>	-25~+70°C

☞ Ambient temperature (storage)	-40~+70°C
☞ Mounting Type	optional
☞ Connection method	push-in connection

Technical data

☞ IEC Rated Voltage	230AC
☞ Overvoltage category	II
☞ Degree of pollution	9
☞ Dielectric withstand voltage	1500VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 1500VAC 1min : BetweenContacts
☞ Endurance	Mechanical 10 million cycles or more Electrical more than 100,000 times
☞ Operating voltage	≤80% of rated voltage
☞ Release Voltage	≥30% of rated voltage
☞ Maximum permissible voltage	110% of rated voltage
☞ Nominal power consumption	About1.1~1.8VA
☞ Response time	20ms or less
☞ Release time	25ms or less
☞ Protective circuit	None
☞ Status display	visual
☞ Maximum switching power	1250VA/150W
☞ Rated load capacity	AC250V/5A DC30V/5A
☞ Rated load current	5A
☞ Insulation resistance	1000MΩ (500VDC)

Commercial data

☞ Order No	RGT-230AC-4C
☞ Packing unit	20
☞ Minimum order quantity	20
☞ Single piece weight	35g

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat