


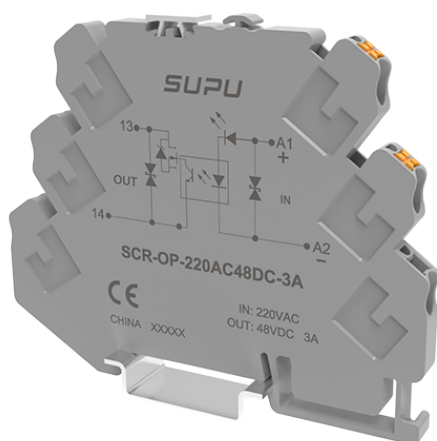


Product Type: Optocoupler solid-state relay

Product Name: SCR-OP-
220AC48DC-3A

Product Description: Optocoupler relay IN:220VAC
OUT:48VDC-3A

Product Size

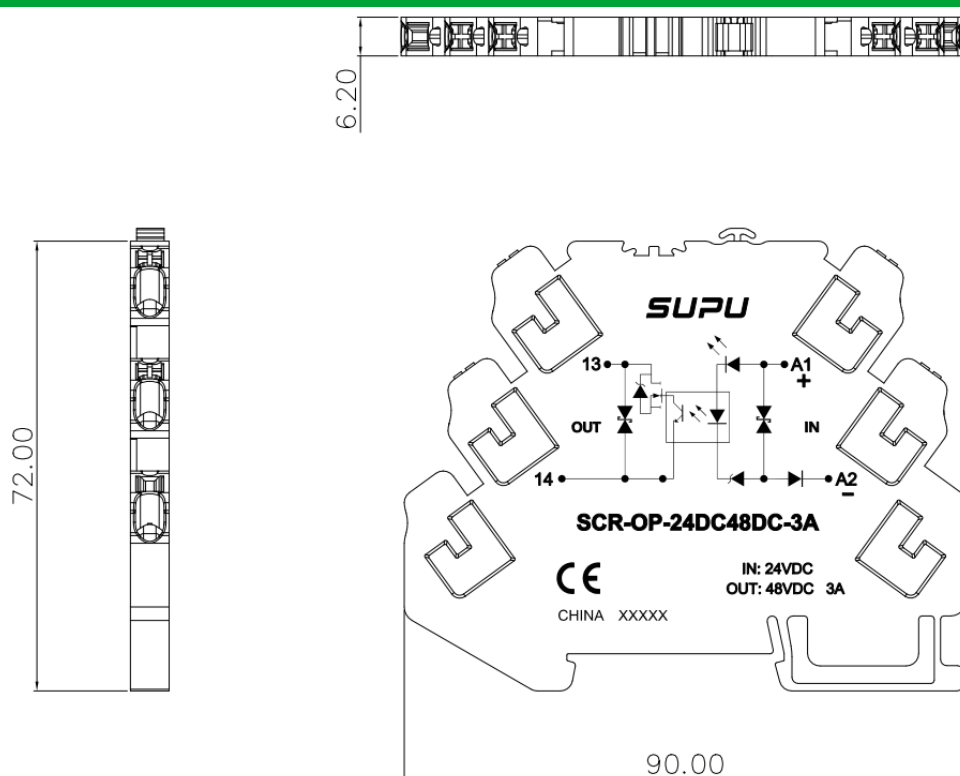

Parameters

⌘ SUPU ID	SCR-OP-220AC48DC-3A
⌘ Contact plating	Tin
⌘ Product family	SCR Series
⌘ Certification in acc. with standard	EN61947-5-1:2017/AC:2020

⌘ Mounting type	DIN 35mm rail mounting
⌘ Assembly note	No spacing arrangement
⌘ Mounting position	optional
⌘ Connection type	NPN / PNP
⌘ Wire Range	26-12/0.2-2.5mm ²
⌘ Impulse withstand voltage	4KV
⌘ 厚x宽x高 (mm)	6.2x90x72
⌘ Plastic materials	PA66

Technical data

⌘ IEC Rated Current	15~50mA
⌘ Protective circuit	Anti-reverse protection, TVS surge protection
⌘ Indicator light	Emerald (LED)
⌘ Maximum switching frequency	10~200HZ*
⌘ Input polarity	Monopole
⌘ Rated switching voltage	5~48VDC
⌘ Rated switching current	100mA~3000mA
⌘ Maximum switching voltage	48VDC
⌘ Continuing current	3000mA
⌘ Voltage dips	8V
⌘ Load type	DC
⌘ Load protection circuit	DC

Commercial data

☞ Order No	SCR-OP-220AC48DC-3A
☞ Packing unit	PCS
☞ Minimum order quantity	10
☞ Single piece weight	24.85

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat