


Product Type: Barrier terminal

Product Name: TBR150-14C-B-  
001

---

Product Description: pitch : 27.0mm, rated voltage UL600V, rated current UL150A, color: black, Rated cross section 20-2/0AWG

Product Size

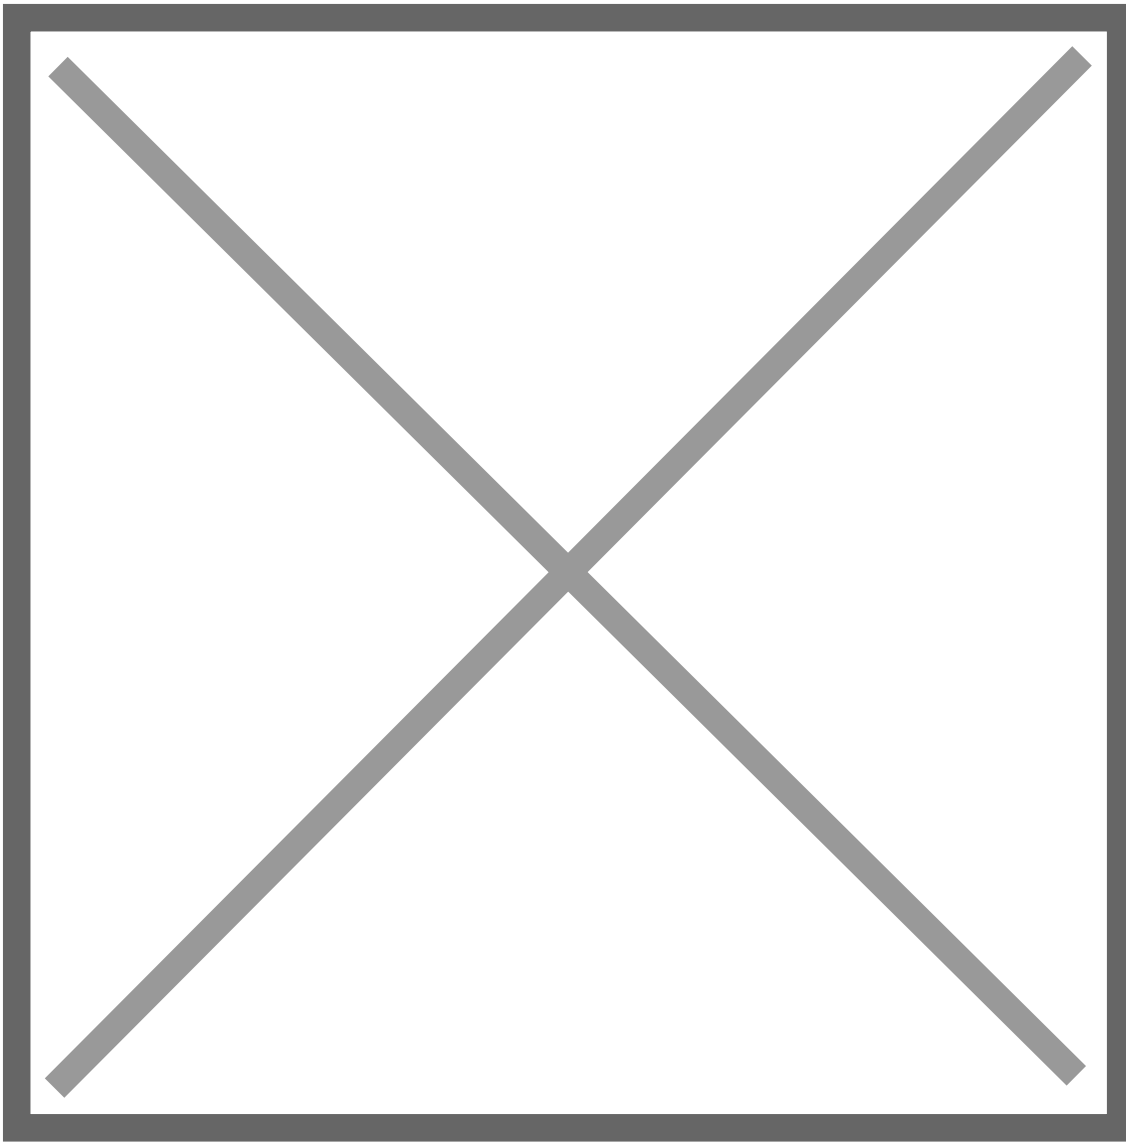

## Parameters

☞ SUPU ID	TBR150-14C-B-001
☞ Pitch	27
☞ Number of levels	single layer
☞ Number of connections	28
☞ Connection method	Screw connection
☞ Protection Level	IP20
☞ Operating temperature range	-40°C ~+125°C
☞ Insulation material	PC

☞ Insulation material group	III
☞ Contact material	Copper alloy
☞ Contact plating	Sn plated

## Technical data

☞ IEC Rated Current	150/150/150
☞ IEC Rated Voltage	1000/1000/1000
☞ Overvoltage category	III/III/II
☞ Degree of pollution	3/2/2
☞ Rated impulse voltage	/
☞ Conductor cross section rigid	0.5-70
☞ Stripping length	16-18
☞ Tightening torque	40
☞ Connection capacity AWG	20-2/0
☞ UL Rated Current	150/150/5
☞ UL Rated Current	600/600/600

## Commercial data

☞ Order No	TBR150-14C-B-001
------------	------------------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2025-11-28 16:23

The right to modify data belongs to SUPU.